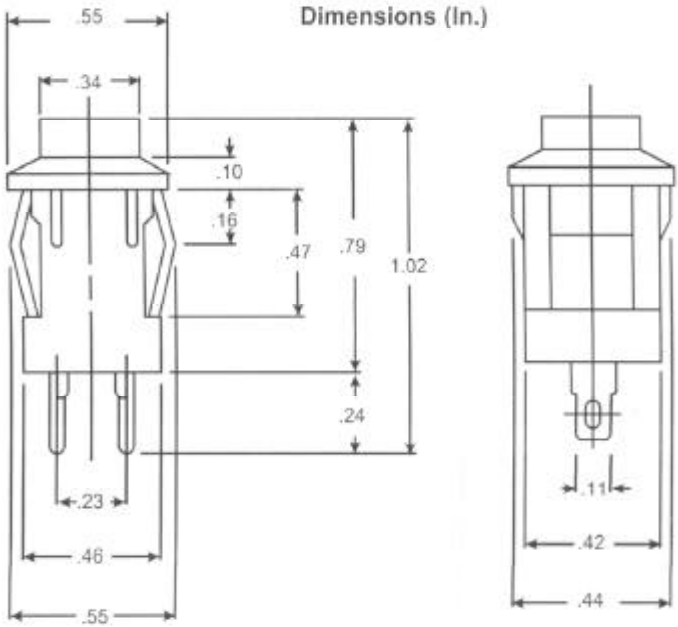

Specifications:

- Rating: 1A @ 125VAC, 5A @ 250VAC
- Circuit: SPST, off-(on) momentary
- Contact resistance: 20mΩ max. @ 1A, 2.5VDC
- Insulation resistance: 100MΩ min. @ 500VDC
- Breakdown voltage: 1500VAC for 1 minute
- Mounting hole: .49 x .44 inches